TOWERIQ
SIGNAL WHERE IT MATTERS

# TowerlinQ™ Installation

ORDERING INFORMATION: TAB.12-10317-1.00

## Features

- First fire and riser rated twisted pair wire backbone made for life safety two-way radio:
- Networking:
  - up to 40 Nodes in network
  - operates on single twisted pair wire with signal ground
  - two-hour rated fire-alarm cable
  - cable length up to 3000 meters (with repeaters)
- Control:
  - system operation control, state and alarm monitoring from DRC
  - TIQ.Cloud remote system control and monitoring
- Devices can be powered from local power supplies
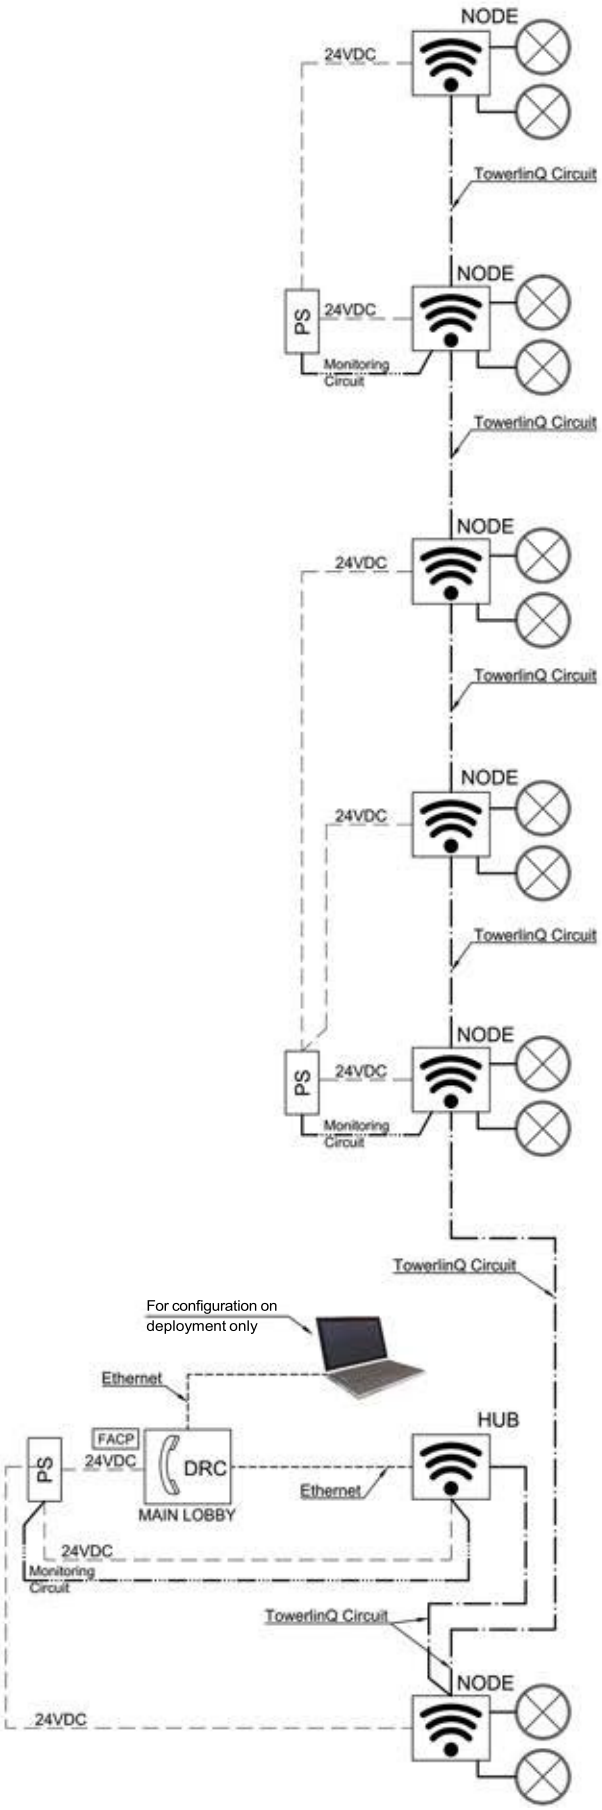
**TowerlinQ Schematic Diagram**